


SPC FLOORING

Waterproof Rigid Core Vinyl Tiles

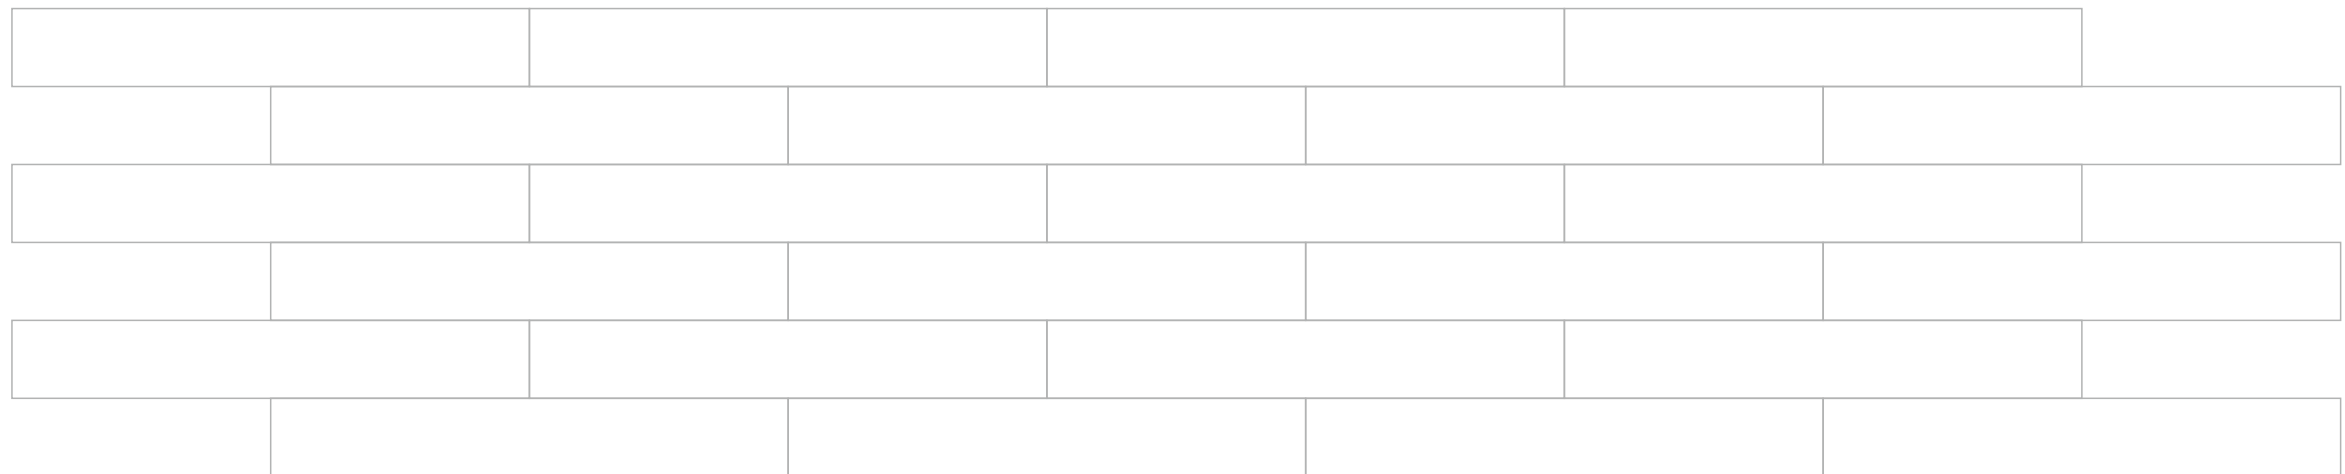

NEW COLLECTION JUNE - 2023

PLANKO[®]

About Our Company


















Welcome to WIN-TEL Group.

WIN-TEL SURFACES LLP is new feather in crown of WIN-TEL Group. WIN-TEL Group is engaged in import-export business since 1995. It has started production of ceramic tiles in 2007 in our various tiles like glazed tiles, porcelain tiles, ceramic floor tiles, ceramic wall tiles in various size, design and colors. We export ceramic & porcelain tiles to USA, Canada, Mexico, Jamaica, Trinidad & Tobago, Brazil, UK, Finland, Greece, The Netherlands, Malta, UAE, Yemen, Bahrain, Jordan, Oman, Egypt, Thailand, South Korea, Australia, Taiwan, Ethiopia, Tanzania, Liberia, Congo DRC, Madagascar etc. since 2011. Our remarkable presence in international market of flooring/surface business.

To serve better to our international buyer our new organization WIN-TEL SURFACES LLP produces SPC Flooring (LVT) in international accepted size, colors, design and quality.




Why SPC Flooring?

-  Lower Thickness & Weight
-  Impact Resistances
-  Easy to Clean Floor
-  Stain Free
-  Green Product
-  Dust free Installaion
-  Flame Resistant
-  Scratch Resistant
-  Easy to Carry
-  Modular
-  Glue Free
-  Less Dead Weight
-  Quick Installaion
-  Recyclable
-  Weather Proof
-  Termite Resistant
-  Water Proof




CLICK TILE

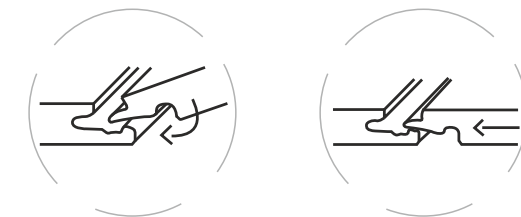

Easy & Hassle Free Installation

Structure

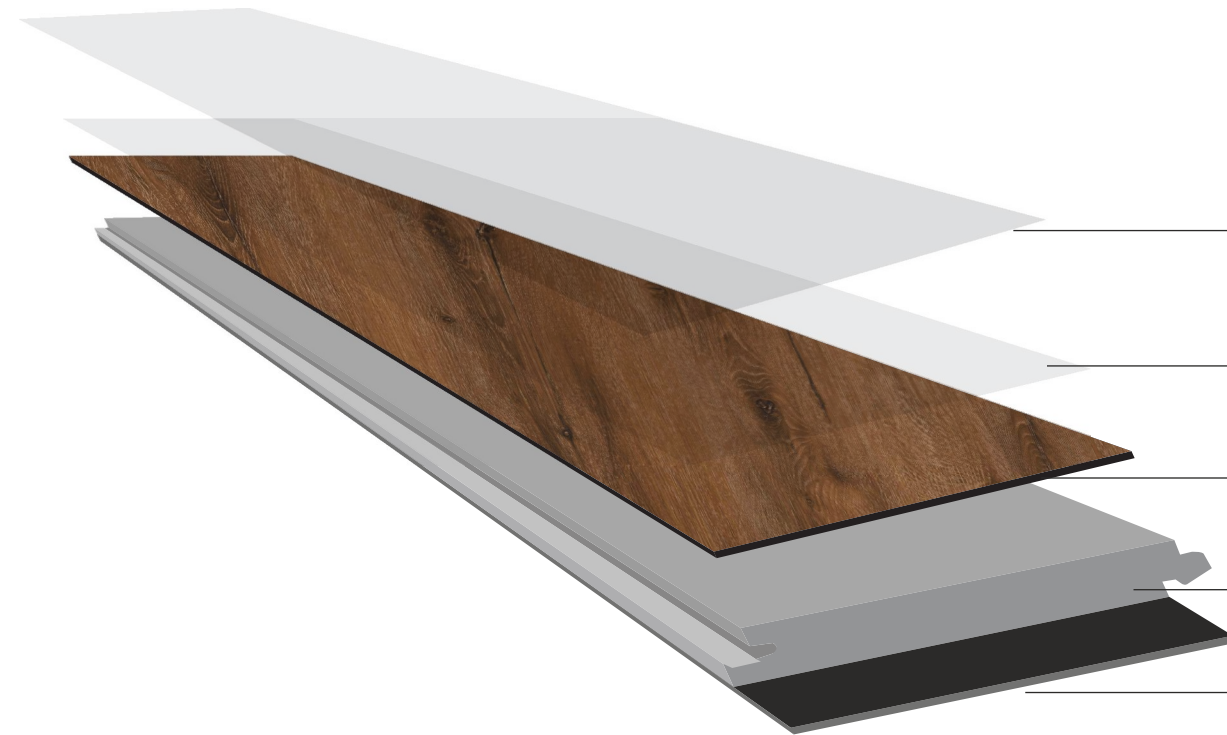

UV Coating

Reduce fading to sun light near window or any other indoor environment

Wear Layer

Strong wear-resistance for foot trac and make the surface scratch resistance.

Decor Film

A design layer of high-resolution photo of real wood that is reproduced with sophisticated printing techniques.

SPC Core Sheet

primary layer of the SPC structure

Underlayment

Effective sound reduction and cushioning incorporates amoisture barrier and mold repellent



PLANKO®

Ala
mo



181x1220x5mm






Design :
ALAMO

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

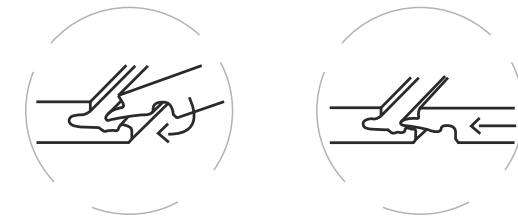

Easy & Hassle Free Installation





PLANKO®

Ath
ena



181x1220x5mm






Design :
ATHENA

Size :
181x1220mm


Thickness :
5mm



CLICK TILE

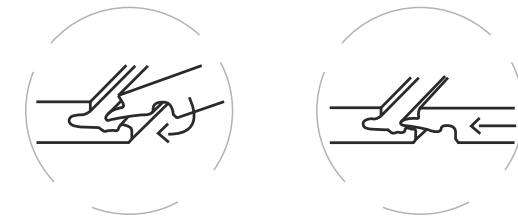

Easy & Hassle Free Installation

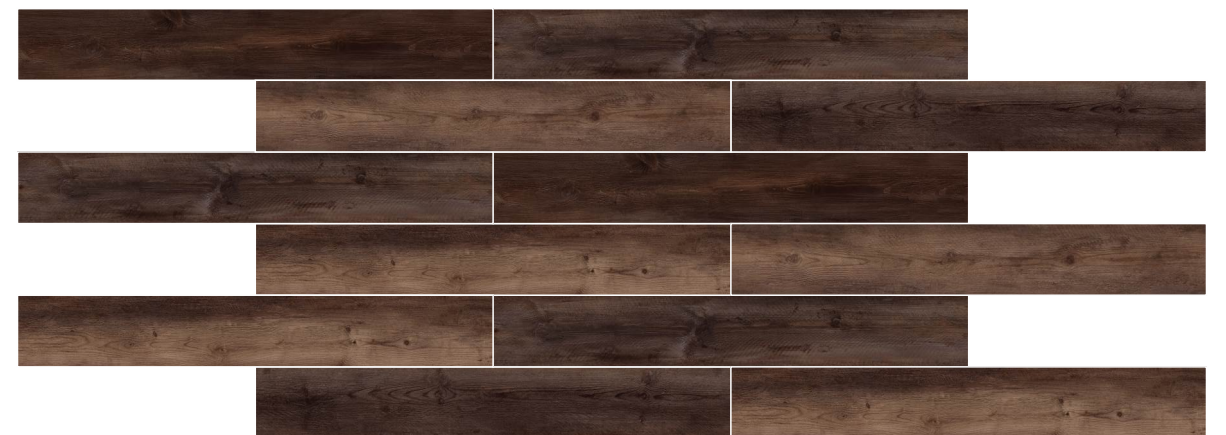



PLANKO®

Ba
Ri



181x1220x5mm







Design :
BARI

Size :
181x1220mm


Thickness :
5mm

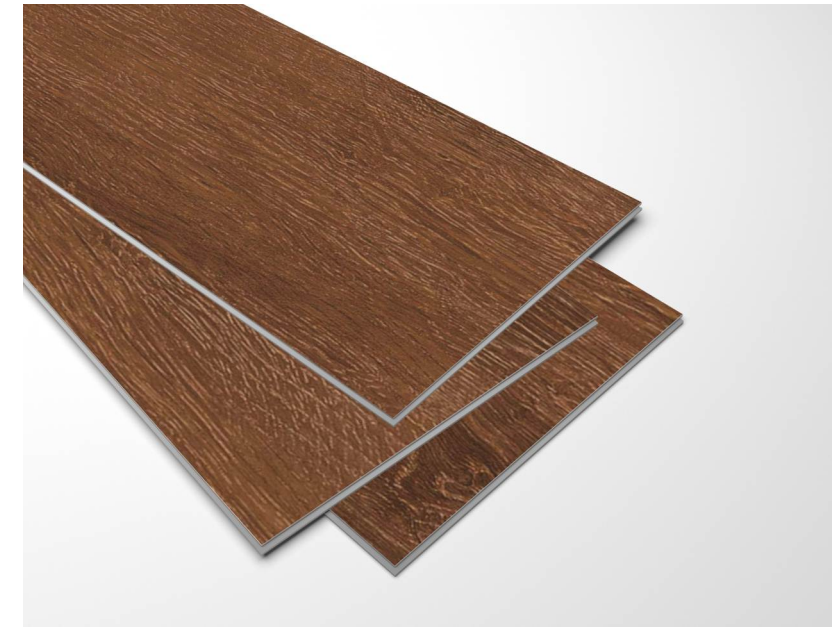

CLICK TILE

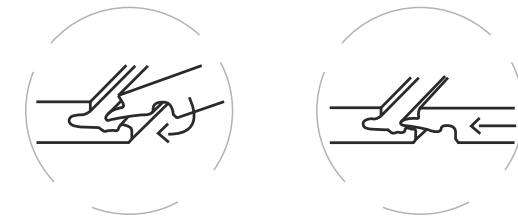

Easy & Hassle Free Installation

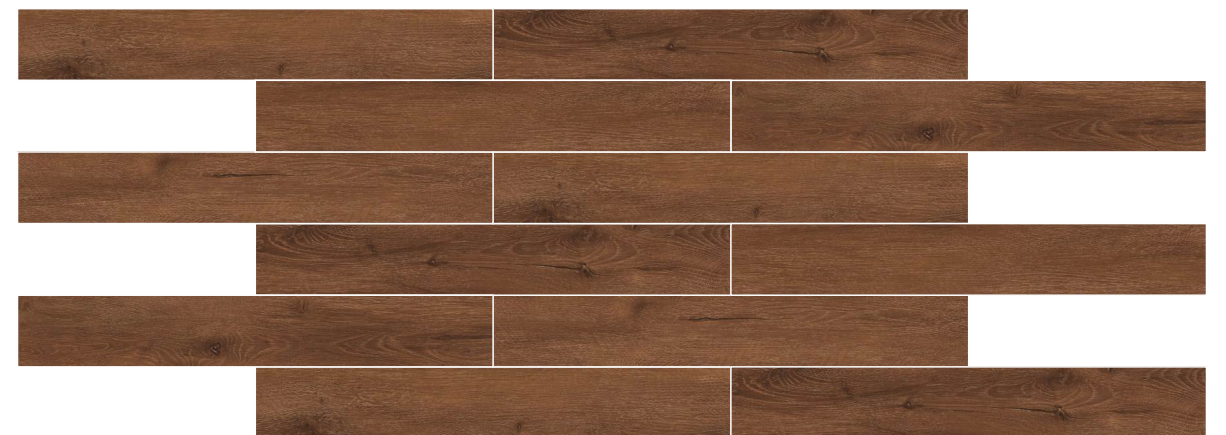



PLANKO®

Bit
Ola



181x1220x5mm






Design :
BITOLA

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

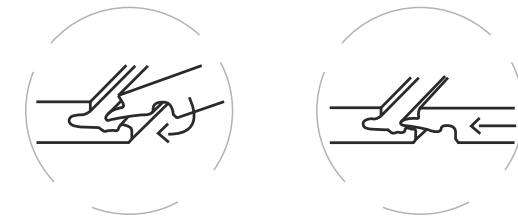

Easy & Hassle Free Installation





PLANKO®

Cl
ir
a



181x1220x5mm







Design :
CLAIR

Size :
181x1220mm

Thickness :
5mm

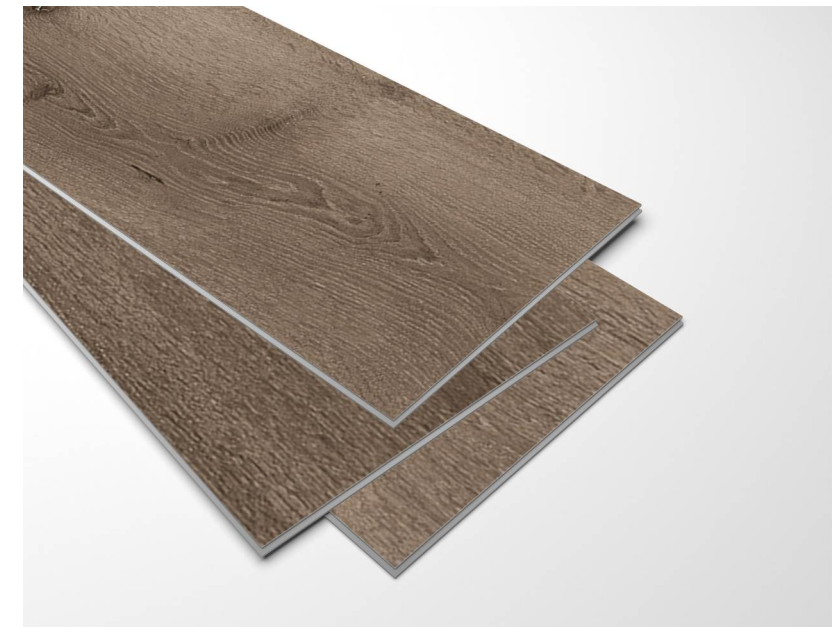

CLICK TILE

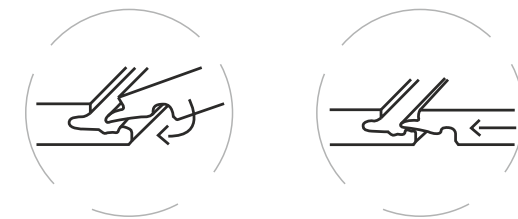

Easy & Hassle Free Installation





PLANKO®

Expre
SSO



181x1220x5mm






Design :
EXPRESSO

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

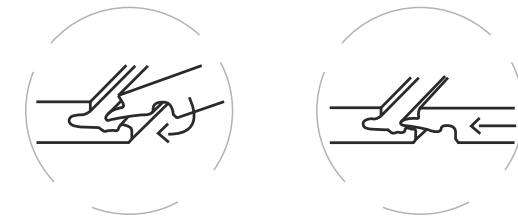

Easy & Hassle Free Installation





PLANKO®

Flu
id



181x1220x5mm






Design :
FLUID

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

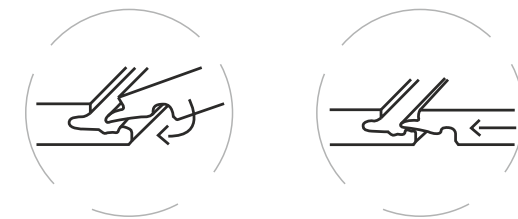

Easy & Hassle Free Installation





PLANKO®

Kodi
ak



181x1220x5mm






Design :
KODIAK

Size :
181x1220mm


Thickness :
5mm



CLICK TILE

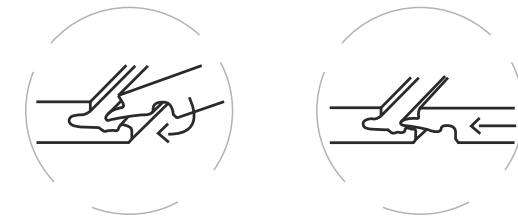

Easy & Hassle Free Installation

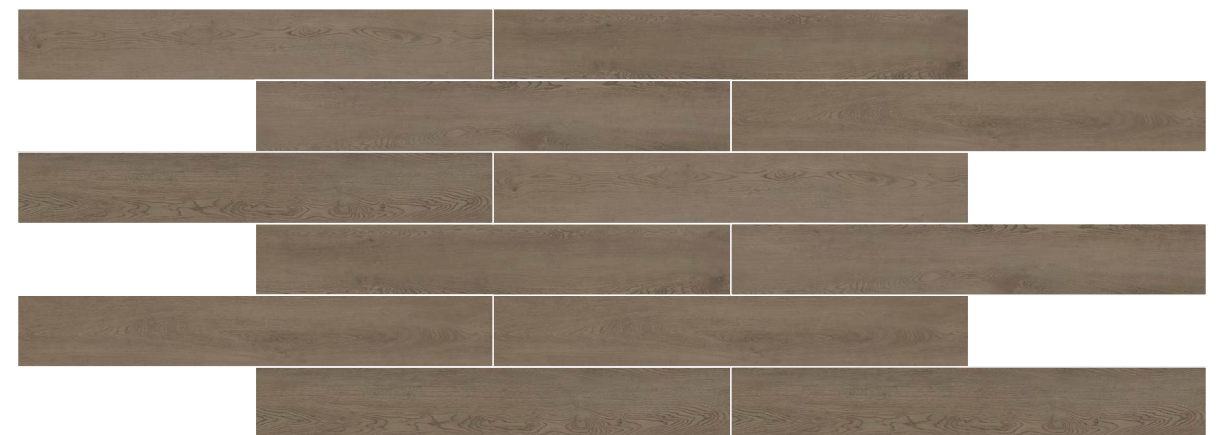



PLANKO®

Lu
na



181x1220x5mm






Design :
LUNA

Size :
181x1220mm


Thickness :
5mm



CLICK TILE

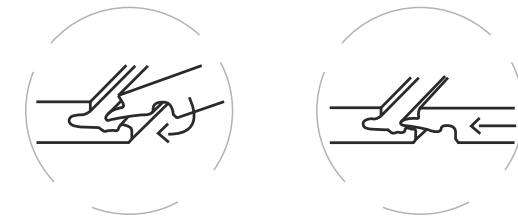

Easy & Hassle Free Installation

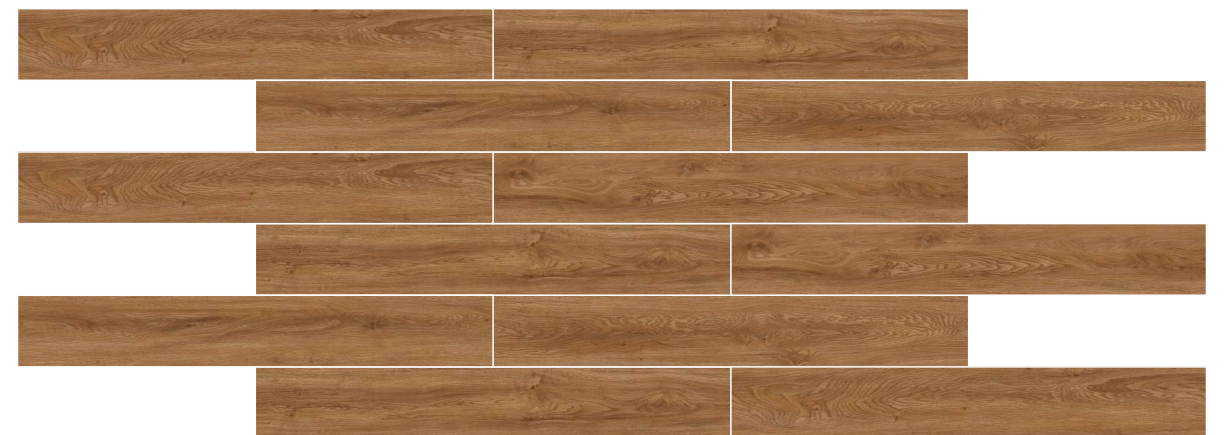



PLANKO®

Milano



181x1220x5mm







Design :
MILANO

Size :
181x1220mm

Thickness :
5mm

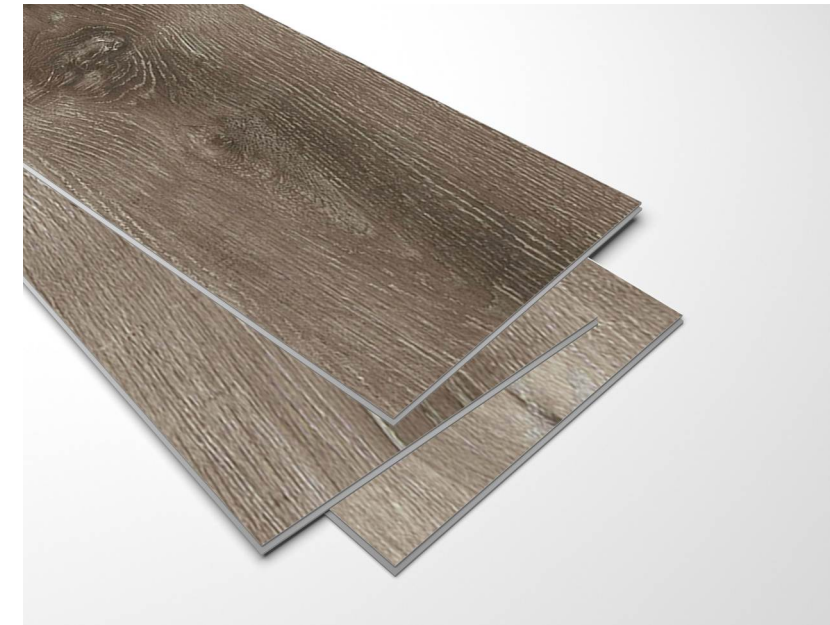

CLICK TILE

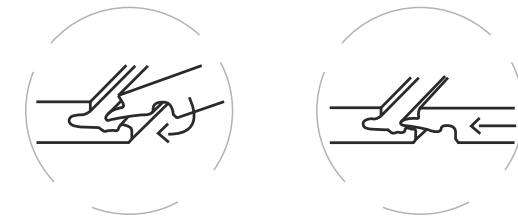

Easy & Hassle Free Installation





PLANKO®

Ne
on



181x1220x5mm






Design :
NEON

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

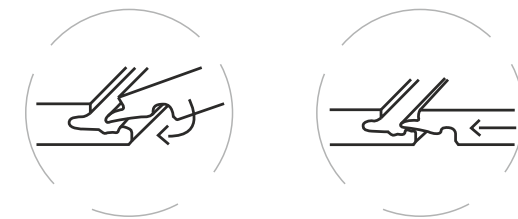

Easy & Hassle Free Installation





PLANKO®

Op
al



181x1220x5mm






Design :
OPAL

Size :
181x1220mm


Thickness :
5mm



CLICK TILE

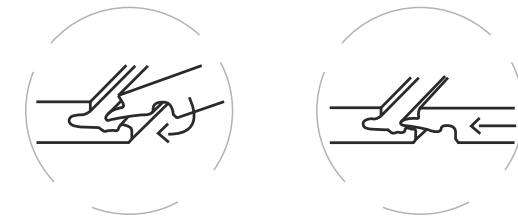

Easy & Hassle Free Installation

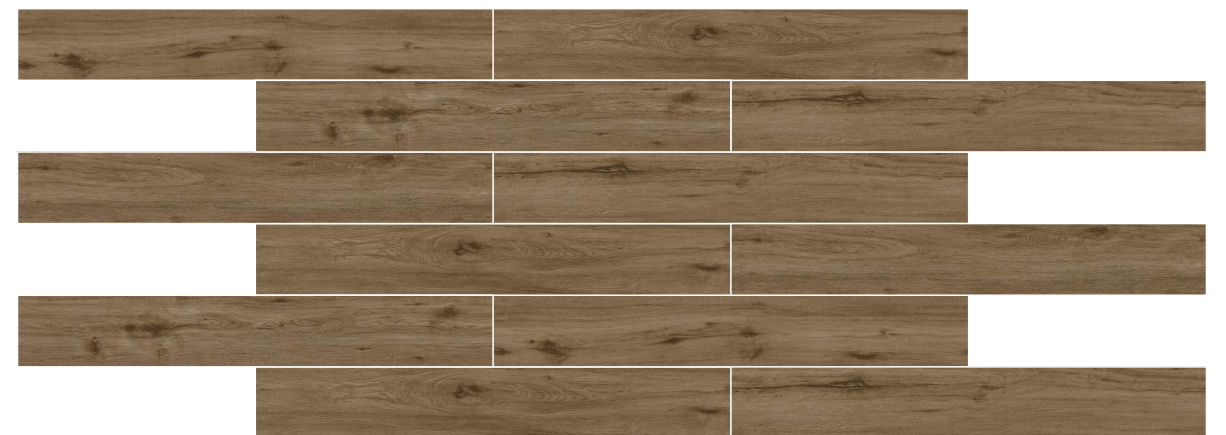



PLANKO®

op
tra



181x1220x5mm






Design :
OPTRA

Size :
181x1220mm


Thickness :
5mm



CLICK TILE

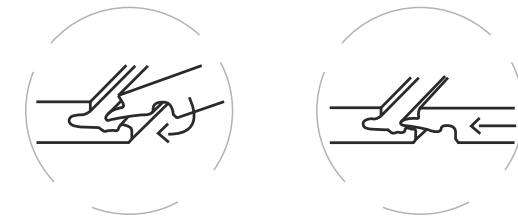

Easy & Hassle Free Installation

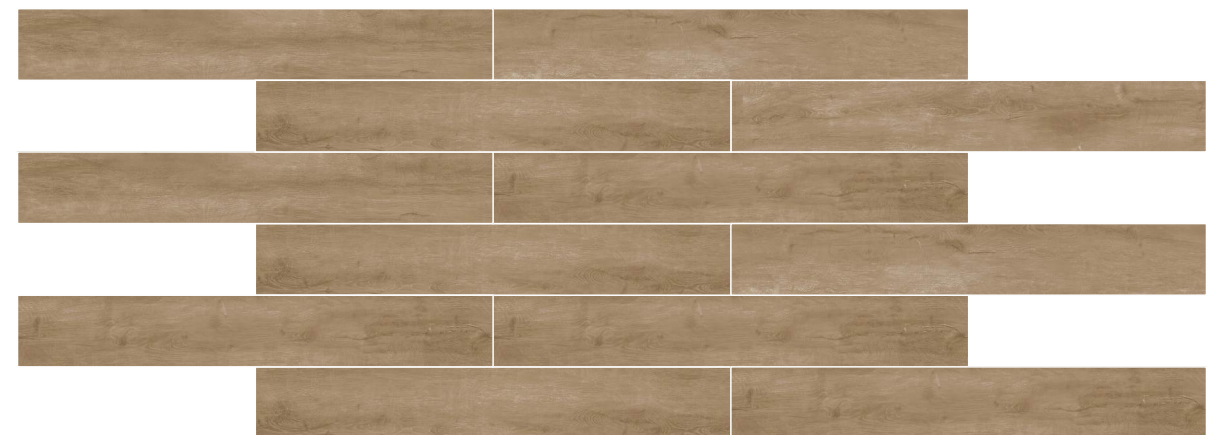



PLANKO®

Ori
an



181x1220x5mm






Design :
ORIAN

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

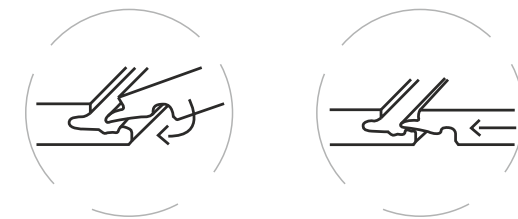

Easy & Hassle Free Installation





PLANKO®

Qua
nta



181x1220x5mm






Design :
QUANTA

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

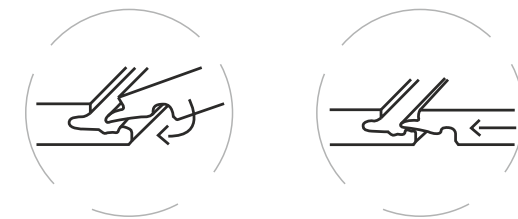

Easy & Hassle Free Installation





PLANKO®

sed
ona



181x1220x5mm






Design :
SEDONA

Size :
181x1220mm


Thickness :
5mm



CLICK TILE

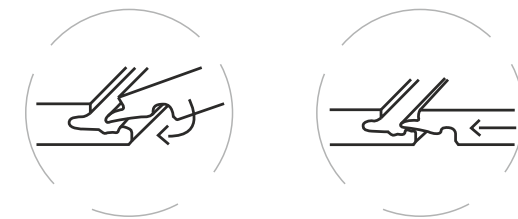

Easy & Hassle Free Installation

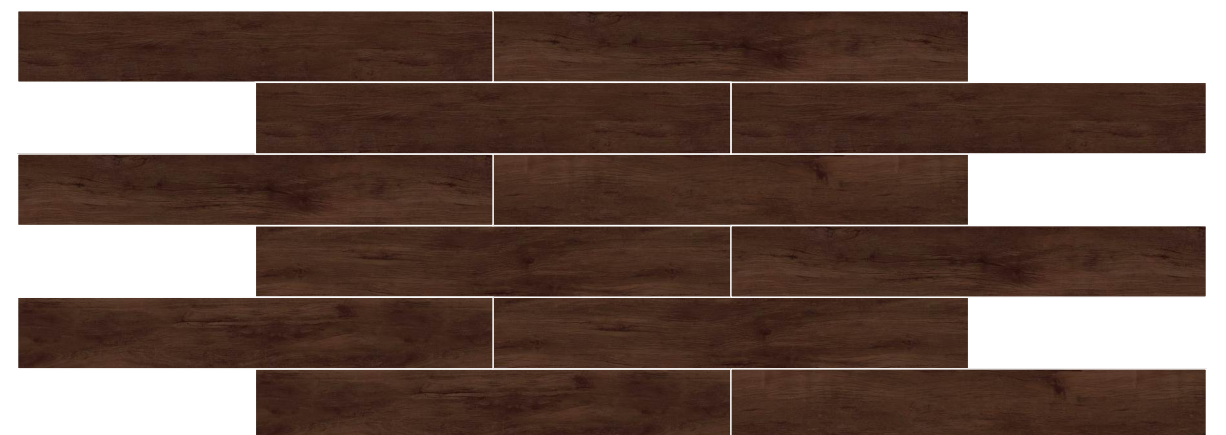



PLANKO®

Sof
ia



181x1220x5mm






Design :
SOFIA

Size :
181x1220mm


Thickness :
5mm



CLICK TILE

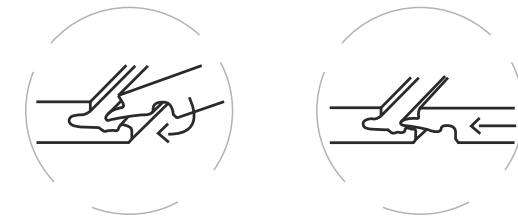

Easy & Hassle Free Installation

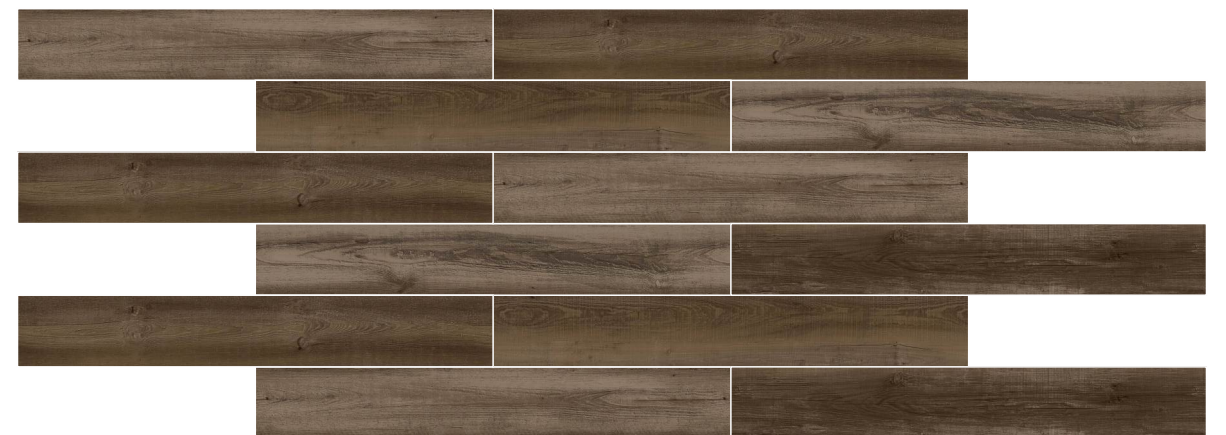



PLANKO®

Tre
nz



181x1220x5mm






Design :
TRENZ

Size :
181x1220mm


Thickness :
5mm



CLICK TILE

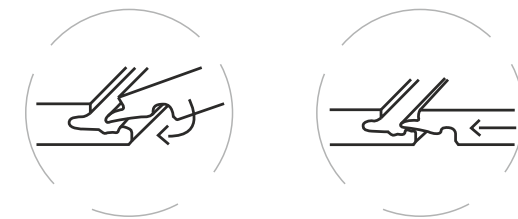

Easy & Hassle Free Installation

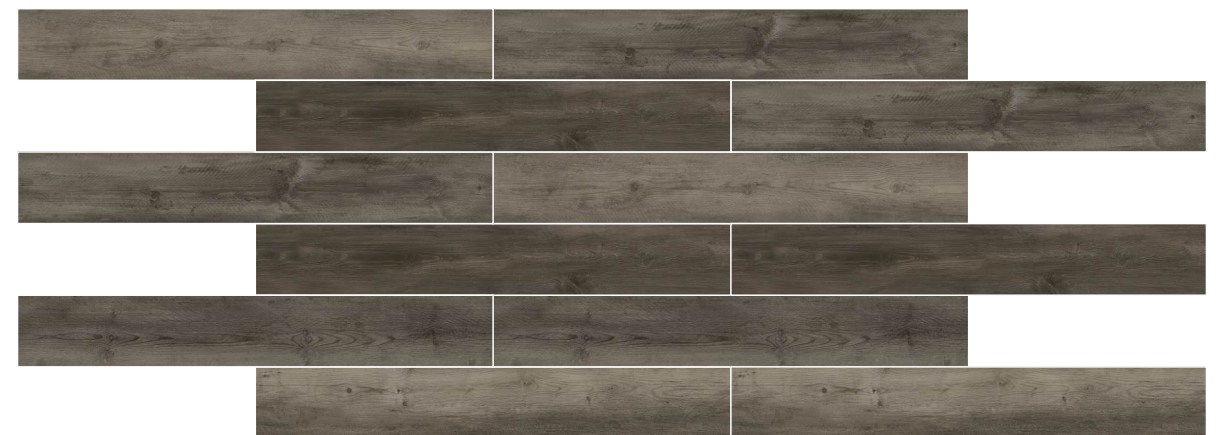



PLANKO®

Twili
ght



181x1220x5mm






Design :
TWILIGHT

Size :
181x1220mm


Thickness :
5mm



CLICK TILE

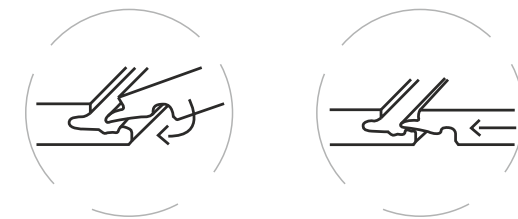

Easy & Hassle Free Installation

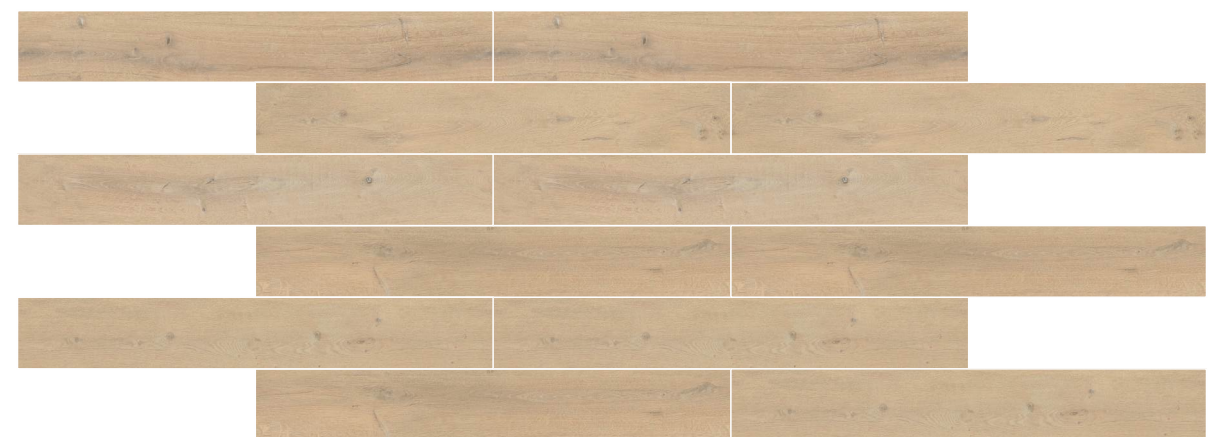



PLANKO®

veli
sh



181x1220x5mm







Design :
VELISH

Size :
181x1220mm

Thickness :
5mm

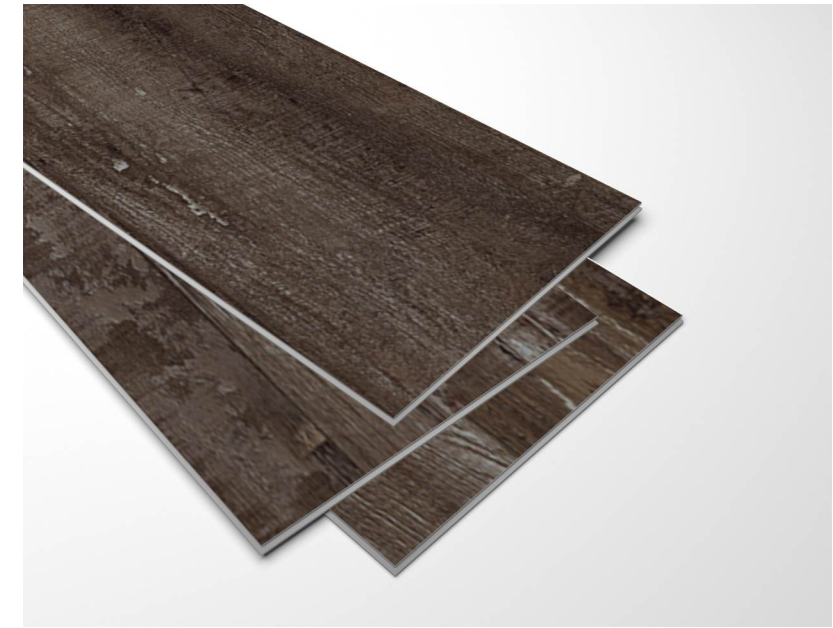

CLICK TILE

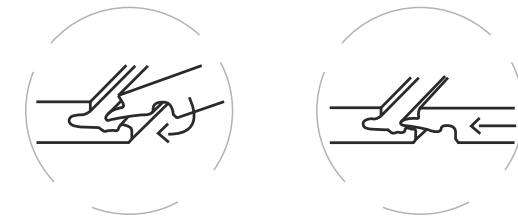

Easy & Hassle Free Installation





PLANKO®

vero
na



181x1220x5mm






Design :
VERONA

Size :
181x1220mm

Thickness :
5mm



CLICK TILE

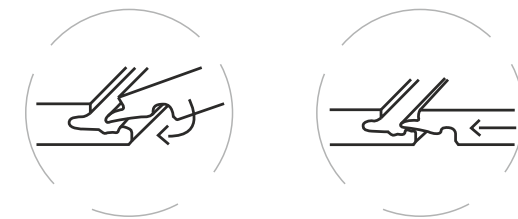

Easy & Hassle Free Installation





PLANKO®

zi
on



181x1220x5mm






Design :
ZION

Size :
181x1220mm


Thickness :
5mm



CLICK TILE

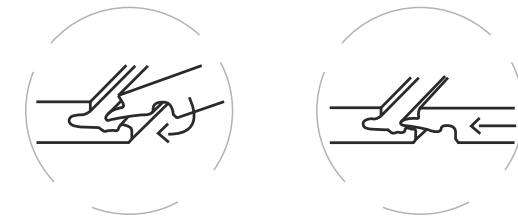

Easy & Hassle Free Installation

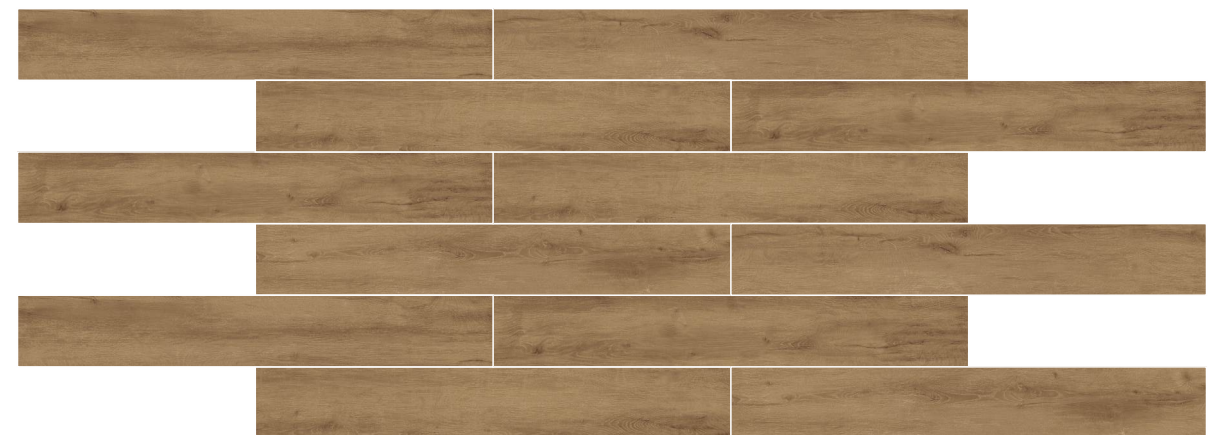



SPC Flooring Technical Data

CHARACTERISTICS	STANDARDS			
	EN	Result	ASTM	Result
Size	EN 427	Pass	ASTM F536	Pass
Overall Thickness	EN 428	Pass	ASTM F36	Pass
Wear Layer Thickness	EN 429	Pass	ASTM F410	Pass
Dimension Squareness and Straightness	EN 427	Pass Squareness:0.18mm Straightness:0.07mm		
Chemical Resistance	EN 423	Pass	ASTM F925, ASTM F1344	Pass
Colour Fastness to Artificial Light	EN20105:B02 Method A	Pass, ≥ Grade 6	ASTM F1515	Pass
Heat Stability by Color Change			ASTM F1514	Pass
Castor Chair Suitability	EN 425	Pass		
Residual Indentation	EN 433	Pass,0.06mm	ASTM F1914, ASTM F970	Pass
Abrasion Group	EN 660-1/2	Group T	ASTM F510, ASTM D3384	Pass
Impact Resistance			ASTM F1265, ASTM D2632	Pass
Dimensional Stability	EN 434	Pass	ASTM F2199	Pass, 0.1%
Sound Reduction	ENISO717-2(ΔLw)	2 dB		
Flexibility	EN 435 Method A	Pass	ASTM F137	Pass
Slip Resistance	EN 13893	Class DS	ASTMD2047-93	Pass
Electrical Resistance	EN 1081 Method C	Pass	ASTM F150-06	Pass
Thermal Resistance	EN 12664	Pass		
Toxic Element Test	EN 71-3	Pass. Not toxic. Does not contain heavy metal and formaldehyde		
Behaviour to Fire	ENISO11925-2 EN13501-1 EN ISO 9239-1	Bf1-S1	ASTM E648-06	Pass/Class1
Smoke Density			ASTM E662	Pass,<450

Product Size & Packing Details

Size	1220 x 181 mm
SPC Core Thickness	4.00 mm to 6.00 mm
Wearlayer	0.30 mm (12mil) & 0.50 mm (20mil)
IXPE Underlayment	1 mm & 2 mm

PLANKO®

WIN-TEL SURFACES LLP



Regd. Office & Factory

27 National Highway, At & Post : Gala Village, Gala Road,
Survey No. 68, Behind Water Works, Morbi 363642, Gujarat, India.



Postal Address

Bhabha House, Opp. Umiya Market, Panchasar Road, Morbi 363641, Gujarat, India.

✉ sandeep@wintelsurfaces.com 🌐 www.wintelsurfaces.com

☎ +91 2822 250075 📠 +91 2822 251076 📞 +91 81286 96376